



8-Port Gigabit GREENnet Switch TEG-S8g(V1.0R)

The compact 8-Port Gigabit GREENnet Switch provides high bandwidth performance, ease of use and reliability, all while reducing power consumption by up to 70%*.

GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings.

Boost your office efficiency and eliminate network congestion with Gigabit speeds and total switching capacity of 16Gbps with Full-Duplex Mode. Plug and Play this desktop switch for reliable high-speed network connectivity.

FEATURES

- 8 x 10/100/1000Mbps Auto-Negotiation, Auto-MDIX Gigabit Ethernet ports
- GREENnet technology reduces power consumption when:
 - a. Ethernet port is not in use
 - b. Connected device is turned off
 - c. Connected device is in power-saving mode
 - d. Based on Ethernet cable length
- Store-and-Forward switching architecture with non-blocking wire-speed performance
- IEEE 802.3x Flow Control for full-duplex mode
- Back pressure Flow Control for half-duplex mode
- Integrated address look-up engine with an 8K absolute MAC address table and 1Mbits RAM data buffering
- Operates and maximizes packet filtering and forwarding rate
- Physical layer port polarity detection and correction
- IEEE 802.3az Energy Efficient Ethernet and GREENnet technology
- Jumbo Frame support up to 9216Bytes
- Sturdy metal housing
- Diagnostic LEDs and Plug & Play
- 3-year limited warranty

*Max power savings compared with standard TRENDnet switches.

8-Port Gigabit GREENnet Switch


TEG-S8g(V1.0R)

SPECIFICATIONS

HARDWARE

Standards	<ul style="list-style-type: none">• IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX• IEEE 802.3ab 1000Base-T; IEEE 802.3x Flow Control; IEEE 802.3az Energy Efficient Ethernet
Network Media	<ul style="list-style-type: none">• Ethernet: Cat. 3,4,5, up to 100m• Fast Ethernet: Cat. 5, up to 100m• Gigabit Ethernet: Cat. 5, 5e,6, up to 100m
Data Rate	<ul style="list-style-type: none">• Ethernet: 10Mbps/20Mbps (half/full-duplex)• Fast Ethernet: 100Mbps/200Mbps (half/full-duplex)• Gigabit Ethernet: 2000Mbps (full-duplex)
Protocol / Topology	<ul style="list-style-type: none">• CSMA/CD, Star
Power Consumption	<ul style="list-style-type: none">• 3.5 Watts (max)
Switch Fabric	<ul style="list-style-type: none">• 16Gbps forwarding capacity
Interface	<ul style="list-style-type: none">• 8 x 10/100/1000Mbps Auto-MDIX RJ-45 ports
Data RAM Buffer	<ul style="list-style-type: none">• 1 Mbits
Filtering Table	<ul style="list-style-type: none">• 8K entries
Jumbo Frame Support	<ul style="list-style-type: none">• 9216Bytes
Diagnostic LEDs	<ul style="list-style-type: none">• Power, Link/ACT, Speed
Power Adapter	<ul style="list-style-type: none">• 5V DC, 1A external power adapter
Dimension	<ul style="list-style-type: none">• 165 x 102 x 28mm (6.5 x 4 x 1.1 in.)
Weight	<ul style="list-style-type: none">• 245g (8.6oz)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40° C (32° ~ 104° F) • Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	<ul style="list-style-type: none">• Max. 90% (non-condensing)
Certifications	<ul style="list-style-type: none">• FCC, CE

NETWORKING SOLUTIONS

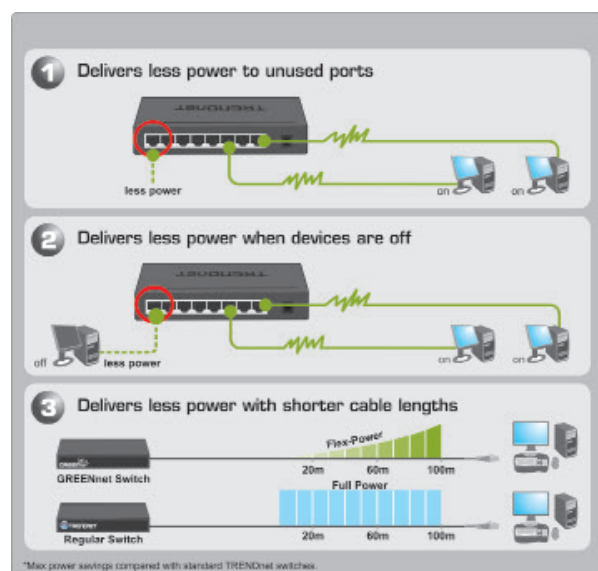

PACKAGE CONTENTS

TEG-S8g

Multi-Language Quick Installation Guide

Power Adapter (5V DC, 1A)

RELATED PRODUCTS

TEW-671BR	300Mbps Concurrent Dual Band Wireless N Router
TEG-PCBUSR	Gigabit PC Card
TEG-PCITXR	Gigabit PCI Adapter
TEG-S5g	5-Port Gigabit GREENnet Switch

CONTACT INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

