


# master view™ 4 Port USB 2.0 KVM Switch

With USB 2.0 Hub and 5 port Ethernet Hub

**Network  
Enabled**



Diagram

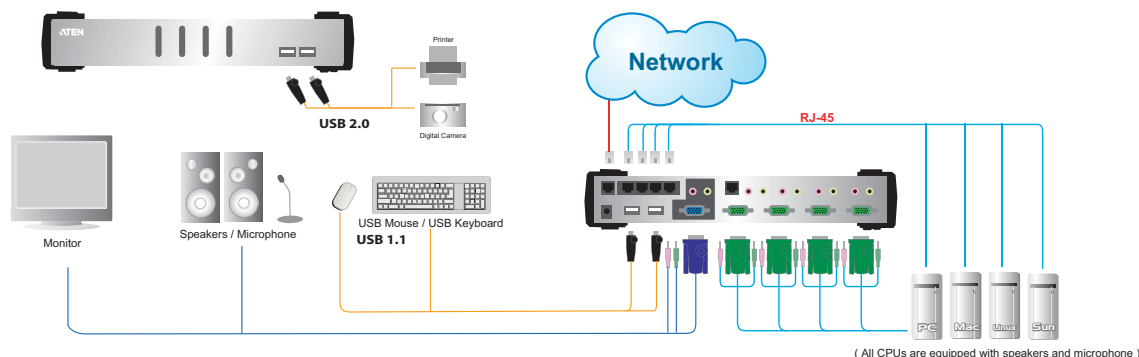

**Model: CS-1772 / CS-1774**

## Features

- Complete USB 2.0 KVM Switch with Ethernet Hub/USB Hub
- Two/Four auto-sensing dual speed ports (Ethernet/Fast Ethernet) plug-and-play enabled; hub complies with IEEE802.3/IEEE802.3u Standard
- Supports Multiple platforms: PC, Mac, Sun
- 2 port USB 2.0 Hub built in
- Buzzer ON/OFF via hotkey
- Permits independent switching of KVM, USB and audio focus between all computers
- Audio enabled

## Specifications

Function	CS-1772	CS-1774
Computer Connections	2	4
Computer	KVM	Hotkeys, Push Buttons
Port selection	USB or Audio	Hotkeys
Connectors/Console	Keyboard	1 x USB Type-A Female (White)
	Video	1 x HDB-15 Female (Blue)
	Mouse	1 x USB Type-A Female (White)
	Speaker	1 x Audio Jack Female (Green)
	Microphone	1 x Audio Jack Female (Pink)
Computers	Keyboard	2 x SPHD-15 Female (Green)
	Video	4 x SPHD-15 Female (Green)
	Mouse	
	Speaker	2 x Audio Jack Female (Green)
	Microphone	4 x Audio Jack Female (Green)
Ethernet Hub	3 x RJ-45 Female (Black)	4 x RJ-45 Female (Black)
Peripheral	2 x USB Type-A Female (White)	5 x RJ-45 Female (Black)
Firmware Upgrade	1 x RJ-11 Female (Black)	
LEDs	KVM	2 (Orange)
	USB or Audio	2 (Green)
	10/100 Mbps	3 (Green)
	LINK	3 (Green)
Keyboard / Mouse Emulation	USB (PC, Mac, Sun)	
Scan Interval	1-99 seconds	
Power Adapter	1 x DC 5.3V, 2.4A	
Power Consumption	DC 5.3V, 4.5W, 900mA	DC 5.3V, 5W, 1000mA
Resolution	2048 x 1536, DDC2B	
Operation Temperature	0°C ~ 50°C	
Storage Temperature	-20°C ~ 60°C	
Humidity	0 ~ 80% RH, NC	
Weight	710g	920g
Dimension	210 x 88 x 55.5mm	270 x 88 x 55.5mm