




acar S8 FA RACK IEC

Surge protective power strip
+ computer power cord
+ EMI/RFI filter
+ rack mount brackets

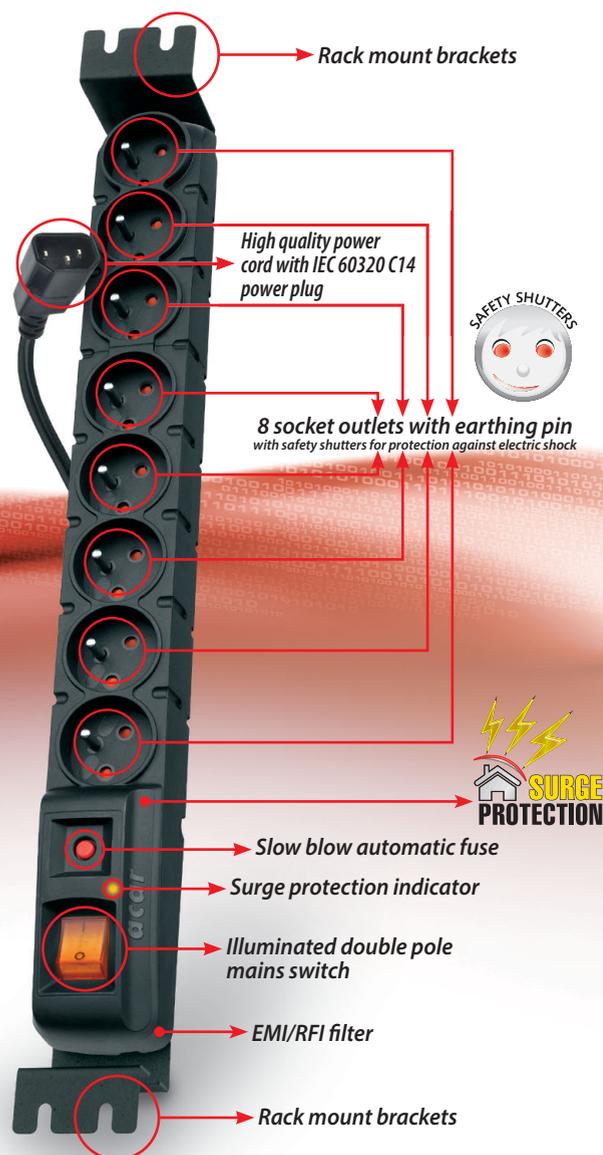

- 8 SOCKET OUTLETS WITH EARTHING PIN**
- SOCKET OUTLETS SAFE FOR CHILDREN**
- ILLUMINATED DOUBLE POLE MAINS SWITCH**
- SURGE PROTECTION INDICATOR**
- AUTOMATIC FUSE**
- SURGE PROTECTION**
- RACK MOUNT BRACKETS**
- AVAILABLE CABLE LENGTHS: 1.5m, 3m, 5m**



The **acar S8 FA RACK IEC** is a professional device in a family of products **acar S8**, equipped with a power plug in the IEC 60320 C14 standard and intended for mounting in 19-inch rack cabinets. It features eight surge protected socket outlets with earthing which in most cases is sufficient to power all the appliances mounted in a 19-inch rack cabinet. The applied high-frequency interference suppression filter increases significantly the security of the connected appliances and the automatic fuse can quickly restore the system to work. The device also has the indicator of proper operation of the surge protection. Durable and rigid self-extinguishing plastic housing meets all requirements for devices for professional use.

ILLUMINATED DOUBLE POLE MAINS SWITCH, SLOW-BLOW AUTOMATIC FUSE, SURGE PROTECTION INDICATOR



8 SOCKET OUTLETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS



RACK MOUNT BRACKETS



Technical data: acar S8 FA RACK

| | |
|-------------------------------------|--|
| Maximum load | P_{MAX} 2300W |
| Nominal voltage U_N | 230V |
| Nominal frequency | 50Hz |
| Nominal load current | $\Sigma I_N = 10A$ MAX |
| Surge protection response time | <25ns |
| Maximum voltage U_C | 250V 50Hz |
| Protection level U_p | $\leq 1.3kV$ |
| Nominal discharge current i_N | 2kA (L/N) – 8/20 μs |
| Maximum discharge current i_{MAX} | 6.5kA (L/N) – 8/20 μs (type 2) |
| Fuses | 1 automatic fuse, slow blow 10A/250V |
| RFI/EMI attenuation | $\leq 35dB$ |
| Anti-shock protection system | earthing pins connected to the protective earthing conductor |
| Number of socket outlets | 8 two-pole socket outlets with earthing pin, 10A/250V |
| Switch | illuminated double pole mains switch |
| Housing | made of self-extinguishing plastic |
| Dimensions | 445x54x55mm |
| Weight | 0.73kg |

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.