


CINCH CABLE, MONO

The audio cable transmits sound to a hi-fi system or amplifier in maximum quality – and over many years. The reason: a strong plug, gold-plated connectors and a flexible double shielded premium cable.

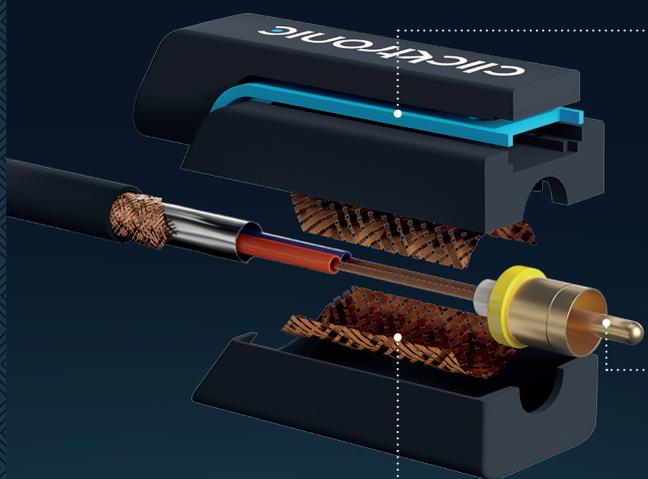

A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE


The plug of the Clicktronic Cinch cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 carat gold. This prevents them from oxidising. Plus: Unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.

DOUBLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the double shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.

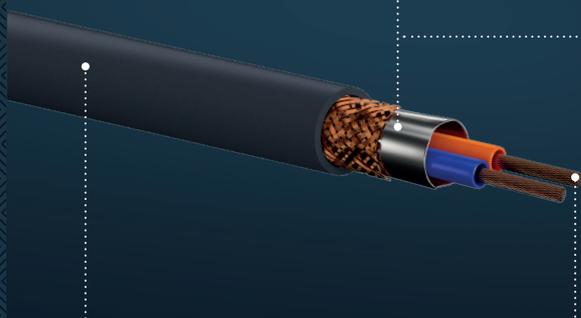

A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic Cinch cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Brilliant audio – even after years: the inner conductors made from 99.9% oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

CINCH CABLE, MONO

THE CONNECTION FOR MAXIMUM SOUND QUALITY

Every sound in its clearest form, without loss: the Clicktronic Cinch cable transmits digital stereo signals in maximum quality – e.g. from a DJ system, DVD and Blu-Ray player or other RCA Cinch devices to a hi-fi sound system, a television or a large home cinema system.



INPUT



OUTPUT

ALL ADVANTAGES AT A GLANCE

CLEAR SOUND

Transmits digital stereo signals in maximum quality from Cinch to Cinch.

BRILLIANT SIGNAL QUALITY

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

NO FLICKERING

Thanks to double insulation.

FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

RUST-FREE CONNECTOR

Even after years – thanks to a 24 carat gold coating.

SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

CINCH CABLE, MONO

SIGNAL TRANSMISSION

TRANSMISSION TYPES: digital audio signals

CAPACITY (pF): 155


MAX. BANDWIDTH (MHz): 10

WAVE IMPEDANCE (Ω): 75


CIRCUIT DIAGRAM

P1 CINCH

P2 CINCH

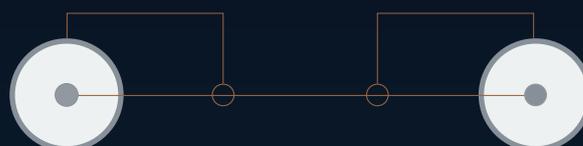

CABLE CROSS-SECTION

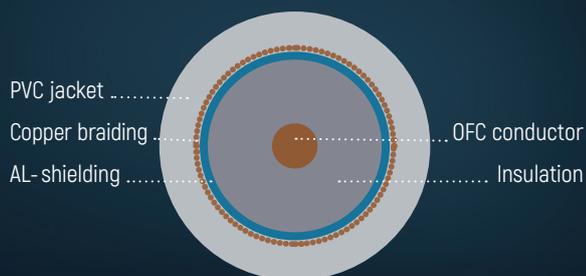

PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET
0.5 – 10 m	20×0.12 mm	24	6 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
0.5 m	9.99 €	1/20/40	70442	4040849704420
1.0 m	10.99 €	1/20/40	70443	4040849704437
2.0 m	12.99 €	1/15/30	70445	4040849704451
3.0 m	14.99 €	1/12/24	70446	4040849704468
5.0 m	19.99 €	1/12/24	70447	4040849704475
7.5 m	24.99 €	1/10/20	70448	4040849704482
10.0 m	29.99 €	1/10/20	70449	4040849704499



SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.