

## HDMI over IP Extender

VE8900

## 4K HDMI over IP Extender

VE8950

- The ATEN VE8900/VE8950 Video over IP Extenders deliver visually lossless 1080p / 4K AV signals with low latency over long distance via a standard Gigabit network.

The VE8900/VE8950 provides an effective, easy-to-use, and economical digital signage solution with the following features and advantages that directly address the challenges system integrators encounter when implementing AV over IP systems:

- Limitless scalability and flexibility
- No complicated IP setup
- No additional server PCs or software required
- Go further for less with daisy chaining

Engineered to meet today's demands of large scale, multi-display, 1080p/4K signal transmission, and designed to be easy to set up and operate, the VE8900/VE8950 Video over IP Extender is an ideal product for a wide range of environments, such as trade shows, airports, university campuses, conference centers, and shopping centers.



Transmitter



Receiver




## Features

### Lightweight Compression with Ultra-low Latency

- Delivers visually lossless high-quality video up to 1080p @ 60 Hz (VE8900) / 4K @ 30 Hz 4:4:4 (VE8950)
- Ensures stunning quality video using ATEN advanced video lossless compression technology
- EDID Expert™ selects the optimum EDID settings for smooth power-up, high-quality display and the best video resolution across different screens

### Limitless Scalability and Flexibility

- Extends AV connections from a simple point-to-point to a multi-point to multi-point setup via LAN without distance limitations
- Offers multi-functionality in extender, splitter, matrix switch, video wall and daisy chain applications
- Mix and match the latest 4K displays and 1080p screens. The built-in scaler automatically scales incoming video signals to match the maximum resolution of the connected display devices

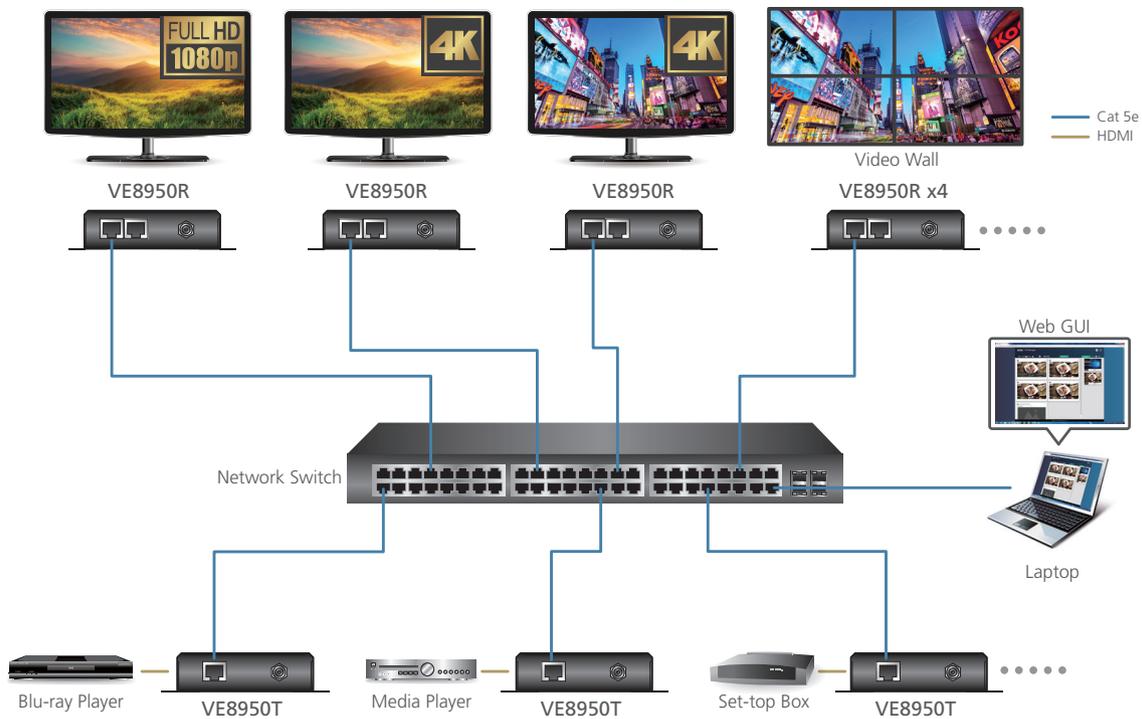

### No Complicated IP Setup

- Simple configuration that requires no IT experience or extra learning
- Effortlessly switches among input sources via top panel pushbuttons




### No Additional Server PCs or Software Required

- Supports web GUI for device management
- No additional server PCs, control boxes, or software/drivers are needed

### Go Further For Less with Daisy Chaining

- Connects multiple displays through a single port to utilize every port of the network switch and maximize their value
- Easily expandable – cabling and system deployment is easy with no huge network switches and fewer cables needed
- Perfect for large-scale deployment covering hundreds of meters, such as hotel facilities, airports, university campuses, stations, shopping malls, and exhibition centers

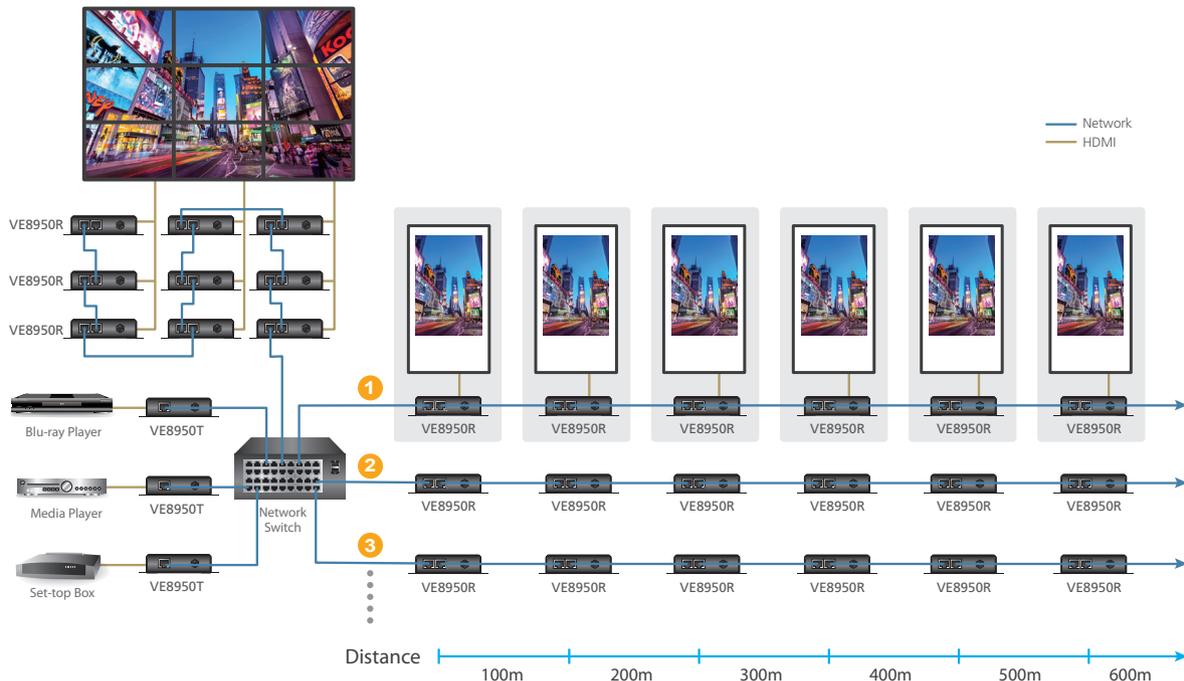

Use daisy chains to configure a video wall or expand the AV system hundreds of meters

### Video Wall Support

- Supports a maximum of 16 x 16 video wall\*
- Supports horizontal or vertical (90° rotation) display orientation
- Easily switches layout profiles, preview and drag-and-drop video sources via the intuitive web GUI

\*Depends on your network architecture, please contact ATEN representatives for more details.


### Embedded / De-embedded Audio Support

- For VE8900T/8950T – separate audio signal can be embedded into the HDMI stream
- For VE8900R/8950R – audio stream can be extracted from the HDMI stream and delivered as a separate audio signal

### Multiple Control Channels

- Multiple control methods – the system can be managed via Ethernet or top-panel pushbuttons
- USB Connectivity – USB port (USB 2.0) allows for connection of devices such as keyboard, mouse, flash drive, printer, and other USB peripherals
- Bi-directional IR Channel – IR transmission is processed one way at a time
- RS-232 Channel – bi-directional RS-232 serial port allows for connection of peripherals such as touch screens and bar code scanners

## Installation Diagram

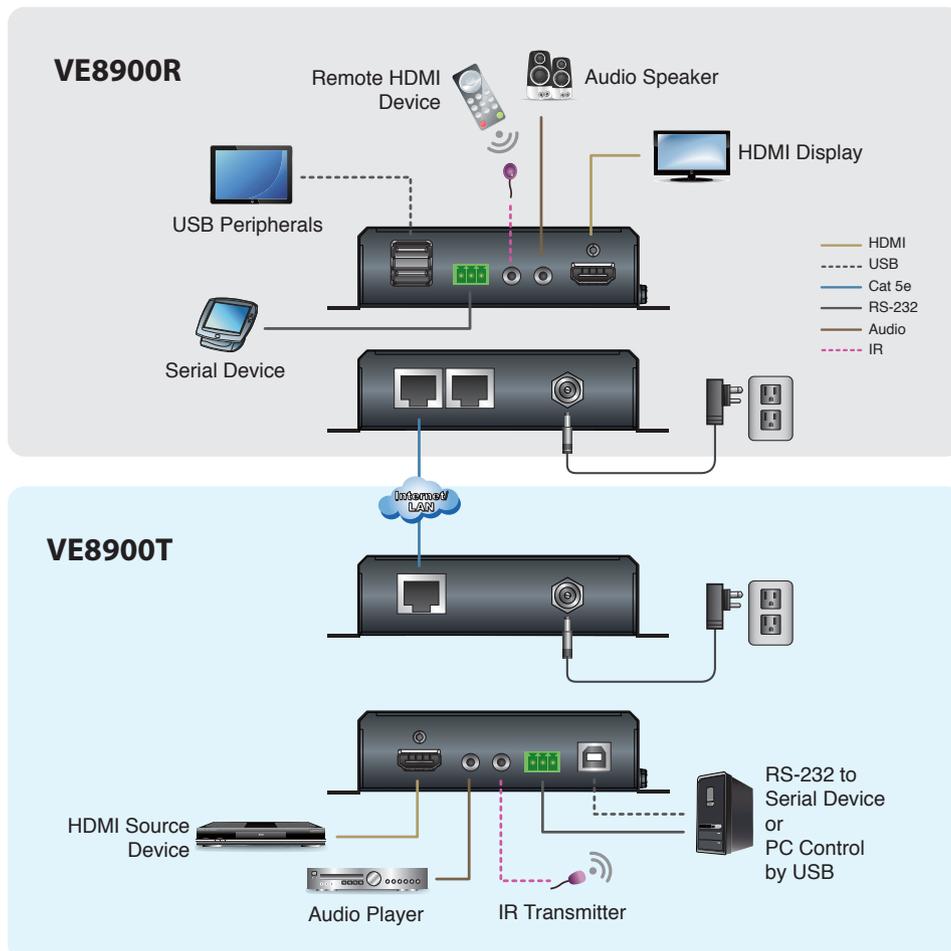

# Specifications

Function	VE8900T	VE8900R	VE8950T	VE8950R
<b>Video Input</b>				
Interfaces	1 x HDMI Type A Female (Black)			
Impedance	100 Ω			
Max. Distance	1.8 m			
<b>Video</b>				
Max. Data Rate	Average: 150 ~ 500Mbps			
Compliance	HDMI	HDMI	HDMI (4K)	HDMI (4K)
	HDCP Compatible			
	Consumer Electronics Control (CEC)			
Max. Resolutions / Distance	Up to 1080p @ 100m (Cat 5e/6, point to point)		Up to 4K @ 100 m (Cat 5e/6/6a, point to point) <b>*4K supported:</b> 4096 x 2160 / 3840 x 2160 @ 60 Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30 Hz (4:4:4)	
<b>Audio</b>				
Input	1 x HDMI Type A Female (Black)			
	1 x Mini Stereo Jack Female (Green)			
<b>Control</b>				
IR	1 x Mini Stereo Jack Female (Black)			
RS-232	Connector: 1 x Terminal Block, 3 pole			
	Baud Rate: 19200, Data Bits:8,			
	Stop Bits:1, no parity and flow control			
USB	1 x USB Type B Female (White)	2 x USB Type A Female (Black)	1 x USB Type B Female (White)	2 x USB Type A Female (Black)
<b>Pushbuttons</b>				
ID Number Selection	2 x Push buttons	3 x Push buttons	2 x Push buttons	3 x Push buttons
<b>Power</b>				
Connectors	1 x DC Jack (Black) with locking			
Consumption	DC 5V, 3.2W	DC 5V, 4.2W (without USB peripheral device loading)	DC 5V, 3.3W	DC 5V, 4.6W (without USB peripheral device loading)
<b>Environmental</b>				
Operating Temperature	0° to 40° C			
Storage Temperature	-20° to 60° C			
Humidity	0 - 80% RH, Non-Condensing			
<b>Physical Properties</b>				
Housing	Metal			
Weight	0.50 kg	0.49 kg	0.50 kg	0.49 kg
Dimensions (L x W x H) with bracket	14.02 x 12.30 x 3.06 cm	14.02 x 12.30 x 3.06 cm	14.02 x 12.30 x 3.06 cm	14.02 x 12.30 x 3.06 cm
Dimensions (L x W x H) without bracket	13.60 x 10.10 x 2.90 cm	13.60 x 10.10 x 2.90 cm	13.60 x 10.10 x 2.90 cm	13.60 x 10.10 x 2.90 cm

