


Lightweight PS/2-USB LCD Console

The CL3000 Lightweight PS/2-USB LCD Console is an integrated KVM (keyboard, monitor, and mouse) console module that serves as the front end console for compatible KVM switches.

Lightweight and with a 19" power-saving LED-backlit LCD, the CL3000 offers a space-saving, streamlined approach to KVM switch technology by integrating a keyboard, LED-backlit LCD monitor, and touchpad in a 1U housing. Additional console ports allows the second user local access, while in conjunction with an ATEN on the NET™ or KVM Extender, you can remotely control computers in different locations just as if you were right there in front of them.



Setup

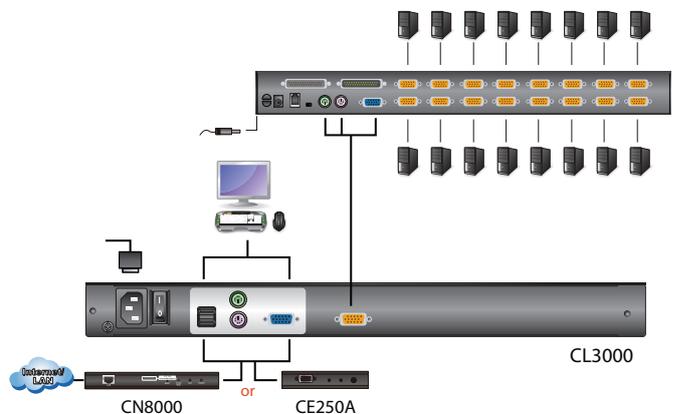

Features

- Integrated KVM console featuring a 19" LCD monitor in a Single-Rail Slideaway™ housing
- Green power LED-backlit LCD monitor saves energy
- Lightweight design for easier installation
- Dual Interface – supports computers with PS/2 or USB keyboards and mice
- Additional hot-pluggable USB mouse port on the front panel (also functions as a USB peripheral port)
- Multiplatform support – Windows, Linux, Mac, and Sun
- Superior video quality – up to 1280 x 1024 @ 75 Hz; DDC2B
- Firmware upgradable
- Extra console port – manage computers from an external console (monitor, USB or PS/2 keyboard and mouse)
- Console lock – the console remains securely locked away when not in use
- Slideaway™ housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- DDC emulation – video settings of each computer are automatically adjusted for optimal output to the monitor
- Adjustable depth to fit within a rack
- Standard 105-key keyboard

Specifications

Function		CL3000	
Computer Connections		1	
Console Selection		Hotkey	
Connectors	External Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple) 1 x USB Type A Female (Black)
		Video	1 x HDB-15 Female (Blue)
	Mouse	1 x 6-pin Mini-DIN Female (Green) 1 x USB Type A Female (Black)	
		KVM Ports	1 x SPHD-18 Male (Yellow)
	USB Port	1 x USB Type A Female (Black)	
	Power	1 x 3-prong AC Socket	
Switches	Reset	1 x Semi-recessed Pushbutton	
	Power	1 x Rocker	
	F/W Upgrade	1 x Slide	
	LED Power	1 x Pushbutton	
	LED Adjustment	4 x Pushbutton	
LEDs	Power	1 (Green)	
		Lock	Num Caps Scroll
		1 (Green)	
		1 (Green)	
Emulation	Keyboard / Mouse	PS/2; USB	
Video		1280 x 1024@75Hz, DDC2B	
I/P Rating		100–240VAC; 50–60Hz; 1A	
Power Consumption		120V, 21.4W / 230V, 22.7W	
Environment	Operating Temp.	0–40°C	
	Storage Temp.	-20–60°C	
	Humidity	0–80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	8.41 kg	
	Dimensions (L x W x H)	58.51 x 48.50 x 4.40 cm	

* Product specifications and appearance are subject to change without notice.