



TU2-ET200 **USB 2.0 Mobile Docking Station**

TRENDnet's TU2-ET200 is an intelligent external USB 2.0 device for connecting to USB enabled PCs or notebooks. This Intelligent high-speed, up to 480Mbps, USB 2.0 Mobile Docking Station allows you to connect eight different external peripherals to its ports simultaneously; one modem serial port, one printer port, one PS/2 keyboard, one PS/2 mouse, three high-speed USB 2.0 ports, and one built-in USB-to-Ethernet adapter port. With the Hot-Plug, the TU2-ET200 is the perfect choice for you to connect any external peripherals including modems, printers, scanners, digital cameras/camcorders, RW CD/DVD ROM, external hard drives, and up to 127 devices at home or in the office.



Features

- > **Intelligent Plug-N-Play**
 - USB 2.0 Mobile Docking Station with compact size design
 - USB 2.0 standard and backwards compatible with USB 1.1 specifications
 - Provide one upstream USB 2.0 port and three downstream USB 2.0
- > **Hub ports**
- > **Auto detects USB downstream port transmission speed with Over-Current protection**
- > **Connect any external USB 2.0, 1.1 devices up to 480Mbps transmission speed**
- > **Built-in ready-to-use 10/100Mbps Fast Ethernet Adapter for network connection**
- > **Built-in Modem port for Windows HyperTerminal and Dialup Networking applications**
- > **Built-in Bi-directional Parallel Printer port, and It is also compliant with any USB printer**
- > **Easy installation and compatible with Windows 98/98SE/ME/2000/XP**
- > **Plug-N-Play feature for USB peripherals, connect or remove any peripherals without powering down the USB 2.0 Mobile Docking Station or the computer**
- > **"Tiered star topology" supports up to 6 tiers (USB Hub) and 127 devices**
- > **Easy to read LED Indicators for Power and USB 2.0 Hub ports for device status monitoring**
- > **Use either USB bus-powered or self-powered with included AC/DC power adapter**
- > **1-Year Warranty**

Benefits

- > **Integration Friendly:**

The USB 2.0 Mobile Docking Station allows you to connect eight different external peripherals to its ports simultaneously. It has a built-in 3-port USB 2.0 Hub, and a built-in ready-to-use USB-to-Ethernet Adapter
- > **Flexible:**

Hot-Plug feature, connect or disconnect to the computer without powering down the computer
- > **Cost Effective:**

Allows you to connect many external peripherals including modems, printers, scanners, digital cameras/camcorders, RW CD/DVD ROM drives, and external hard drives. Save on time, equipment cost, and space
- > **Performance:**

This Intelligent high-speed device supports up to 480Mbps transmission data rate

TU2-ET200

USB 2.0 Mobile Docking Station

Specifications

Computer Connection:

- 1 upstream USB 2.0 port

Interface:

- USB 2.0 Standard, 1.1 Specifications Compliant

USB Cable:

- 1 x 1.8 meters (6 ft) USB 2.0 AB type cable

Console Port Connectors:

- 1 x PS/2 Keyboard 6-pin mini DIN female
- 1 x PS/2 Mouse 6-pin mini DIN female
- 1 x RJ-45 10/100Mbps Fast Ethernet
- 1 x DB 9-pin RS-232 Standard Modem Serial port male
- 1 x DB 25-pin IEEE-1284 Standard Bi-directional Parallel Printer port female
- 1 x USB 2.0 / 1.1 type B upstream port
- 3 x USB 2.0 / 1.1 type A downstream ports

Driver Support:

- Windows 98/98SE/ME/2000/XP/2003 Server

LED Indicator:

- 1 x Power
- 3 x USB 2.0 Hub port

Power:

- USB bus-powered or included AC/DC Power Adapter
- 5V DC, 1.8 A (switching power adapter). 10 Watts max

USB-Power Consumption:

- 450mA ~ 500mA max

Dimensions:

- 118 x 64 x 25 mm
(4.65 x 2.5 x 0.98 inches)

Weight:

- Apprx. 117 g. (0.26lb.)

Temperature:

- Operating: 0° ~ 70°C
(32° ~ 158° F)
- Storage: 0° ~ 85°C
(32° ~ 185° F)

Humidity:


- 0%~80%, Non-Condensing

Certification:

- FCC, CE



Solution de Réseaux

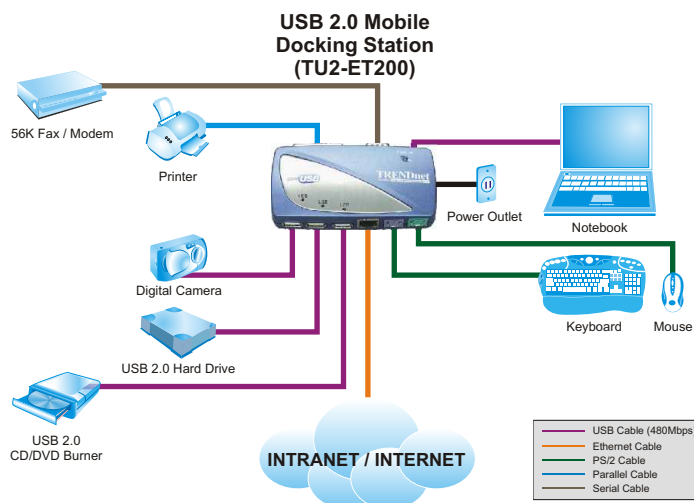

To Order Please Call:
1-888-326-6061

RELATED PRODUCT

- **TU2-400:**
4-Port Hi-Speed USB Hub
- **TU2-ET100:**
Hi-Speed USB to Fast Ethernet Adapter
- **TU2-PCBUS:**
2-Port USB 2.0 CardBus Adapter

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

